


## Wall-Tube 9/R 160

### Description and functions

The wall-tube is used to install the e<sup>2</sup>/ or sill (exception e<sup>90</sup> and Ne<sup>xt</sup>) instead of e<sup>2</sup>neo, e<sup>90</sup>, RA 15-60, AB 30/60 and ALD into the outer wall. Furthermore, the wall-tube can be used together with the LUNOtherm facade element so as to redirect the duct outlet into the window reveal

Included in the scope of delivery:  
Wall-tube, 500 mm or 700 mm long, with two Styrofoam plaster protection caps.

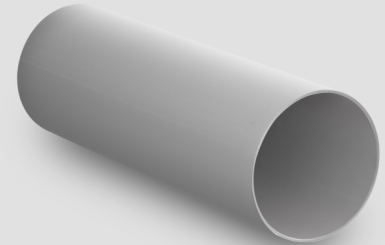

### Installation

A wall opening with a core bit diameter of 162 mm is required for the installation of the Ø160 mm wall-tube.

The drilling is carried out with a slight incline of about 3 mm to the outside (height difference inside/outside).

The wall-tube must be shortened flush with the interior and exterior plaster.

In the shell construction, care must be taken to ensure the excess length required to bridge the plaster thickness on both sides.

For avoiding pore water and for stabilisation, the pipe must be sealed around the inside and outside with an assembly adhesive.

### Accessories

Wall installation housing  
     9/MRD 18cm  
     9/MRD 24cm  
     9/MRD 30cm  
     9/MRD 36cm  
 End pieces wall installation housing  
     9/MRD 12cm  
     9/MRD 6cm  
 Assembly adhesive

### Technical data

Wall-tube dimensions in mm (Ø x L)  
     160 x 500 (can be shortened)  
     160 x 700 (can be shortened)

Material                      (PP) Polypropylen

Fire protection class  
     B1, flame retardant  
     according to  
     P-BWU03-I-16.5.8

### Further details

Brand                      LUNOS

Type                        9/R 160  
 Order No.                036 765

Type                        9/R 160-700  
 Order No.                039 891

### Note

Products and illustrations may vary slightly.  
 Due to continuous product development and/or several suppliers e.g. for raw materials, colours, among other things, may vary slightly or be shown differently in brochures.

Manufacturer's warranty: 2 years

E259 02.17 EN

Editing status: February 2017